



Cistern Pumps



CAPITAL SEPTIC SUPPLY



Ashland Pump – CPM Series

The Ashland Pump CPM Series is designed to operate in filtered effluent/gray water applications. The bottom suction design allows for maximum drawdown of fluid and the hydraulic stages are able to pass 1/8” solids without damage to the pump.

Installations in cistern tanks, rain basin catchments or anywhere drawdown levels need to be maximized are ideal applications for the Ashland Pump CPM Series.

APPLICATIONS

- Filtered Effluent Water Pumping
- Gray Water Pumping
- Water Feature / Aeration Applications
- Rain Water Basin Applications

FEATURES


- Bottom suction design for maximum drawdown
- Able to pass 1/8” solids
- Available in 10, 20 and 30 GPM flow rates
- ½ HP, 115V and 230V single phase motors
- Heavy duty discharge with stainless steel internal threads
- 300 Volt, 10’ SJ00W jacketed lead
- High shut-off pressure
- Quiet operation
- Standard removable base for stable mounting



ORDERING INFORMATION

CPM SERIES CISTERN PUMP							
Model/Order No.	GPM	HP	Voltage/Ph.	FLA	Stage Count	Length (in.)	Shipping Wt. (lbs.)
10CPM-115	10	1/2	115/1	10	7	26	17
10CPM-230	10		230/1	6	7	26	17
20CPM-115	20		115/1	10	5	25	16
20CPM-230	20		230/1	6	5	25	16
20+CPM-115	20+		115/1	10	6	26	17
20+CPM-230	20+		230/1	6	6	26	17
30CPM-115	30		115/1	10	4	25	16
30CPM-230	30		230/1	6	4	25	16

Ashland Pump CPM Series Cistern Pump Performance

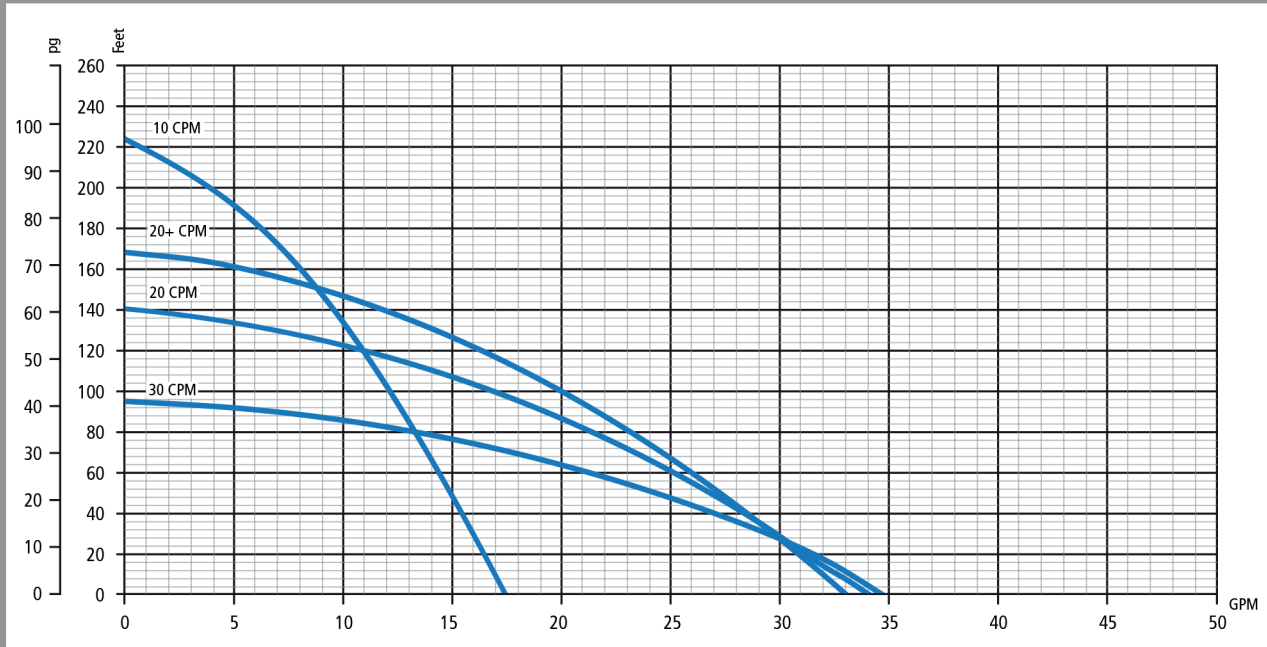

CAPITAL SEPTIC SUPPLY

