




CAPITAL SEPTIC SUPPLY



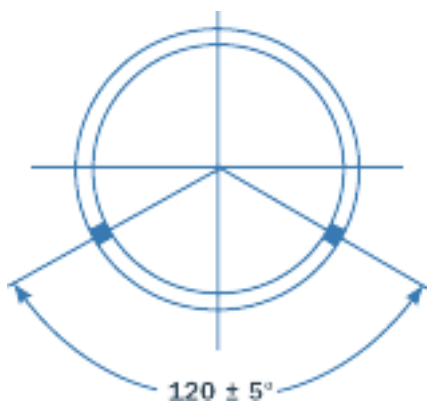

ASTM designation D2729, material code, manufacturer's name and code.

Color

ASTM D2729 perforated pipe is white.

Length

Standard pipe is manufactured in 10' over-all lengths.

ASTM D2729					
Pipe Size	Outside Diameter	Minimum Wall	*Bell Length	Hole Size	Hole Spacing per Row
4"	4.215"	0.075"	4"	½"	6"



Color

Standard Schedule 40/DWV is white. Purple (marked "Caution - Do Not Drink Reclaimed Water").

Length

Standard pipe is manufactured in 20' over-all lengths. ½" through 8" is available in 10' over-all lengths.

Pipe Size	Pressure Rating	Outside Diameter	Minimum Wall	*Bell Length
½"	600	0.840"	0.109"	1.75"
¾"	480	1.050"	0.113"	2.00"
1"	450	1.315"	0.133"	2.00"
1 ¼"	370	1.660"	0.140"	2.25"
1 ½"	330	1.900"	0.145"	2.75"
2"	280	2.375"	0.154"	4.00"
2 ½"	300	2.875"	0.203"	4.50"
3"	260	3.500"	0.216"	4.50"
4"	220	4.500"	0.237"	6.50"
6"	180	6.625"	0.280"	7.00"



Color

Schedule 80 pipe is grey.

Length

Standard pipe is manufactured in 20' over-all lengths.

Pipe Size	Pressure Class	Outside Diameter	Minimum Wall
1"	630	1.315"	0.179"
1 ¼"	520	1.660"	0.191"
1 ½"	470	1.900"	0.200"
2"	400	2.375"	0.218"
3"	370	3.500"	0.300"
4"	320	4.500"	0.337"



ASTM designation SDR35, material code, manufacturer's name and code.

Color

ASTM SDR35 perforated pipe is white.

Length

Standard pipe is manufactured in 10' over-all lengths.

ASTM D2729					
Pipe Size	Outside Diameter	Minimum Wall	*Bell Length	Hole Size	Hole Spacing per Row
4"	4.215"	0.075"	4"	½"	6"

NOTE:

If you have a specific size on a specific type of pipe that is not listed, we can special order more sizes upon order request





CAPITAL SEPTIC SUPPLY

